

## Model: ST-SMDLxM

**720 kA Per Phase\***  
**ANSI/UL 1449-2006 Third Edition**

- A = Type 2 SPD,  $I_n = 10$  kA
- B = Type 2 SPD,  $I_n = 20$  kA
- C = Type 1 SPD,  $I_n = 10$  kA
- D = Type 1 SPD,  $I_n = 20$  kA



\* Based on 3 Phase Wye, 4 Wire and Ground  $I_n$  = Nominal Discharge Current per ANSI/UL 1449-2006

### Key Features

- Discrete “All Mode” Circuitry: Directly Connected Protection Elements in “All Modes” (10 modes for 3 phase Wye circuits) as recommended by IEEE Std. 1100-2005
- Industry Leading Measured Limiting Voltage (let-through) Performance
- Local & Remote Diagnostics
- Independent Verification of Performance and Safety
- No moving parts or springs - No mechanical or electro-mechanical thermal/over-current protection
- Component-Level, Thermal Fusing
- Patented Internal, Circuit Board Mounted, Over-Current Fusing
- 25 Year Unlimited Free Replacement Warranty

**Advantage**  
Series



“we ARE the standard!”

**Application:** The ST-SMDLxM series was developed for use at high ampacity service entrances, distribution panels, and disconnects. This versatile unit is robust enough to handle the punishment of the largest industrial service entrance applications while still providing protection from transients that are generated inside the facility. This device is especially well suited for lightning prone locations as well as locations within or adjacent to transient generating industrial facilities.

**ANSI/IEEE C62.41.1 & C62.41.2-2002 environments:** Suitable for Categories: A, B & C (Most Severe Electrical Environments)

**IEC Environments:** Suitable for use in IEC 61643-11 environments

**Circuit Topology:** Parallel configured **Voltage Responsive Circuitry** circuit design incorporating component-level, thermal fusing and circuit board mounted, **Patented** internal over-current fusing methodology with discrete “All Mode” protection (10 modes for 3 phase Wye units). All protection circuits are encapsulated in our high-dielectric compound to promote long component life and protection from the weather and vibration.

**Protection Modes:** Industry-best practice of dedicated protection components for all operational modes of the electrical system. **Discrete L-N, L-L (Normal Mode) and L-G, N-G (Common Mode)** Example: Directly Connected Protection Elements in All 10 modes for a 3 phase, 4 wire, Wye system, (i.e. 3 L-N modes, 3 L-L modes, 3 L-G modes and 1 N-G mode).

**Input Power:** 50-400 Hz (60 Hz nominal)

**Temperature Rating:** Up to 80°C

**Standard Enclosure:** NEMA 12 Rated, painted steel enclosure  
(Other enclosure options available see pg. 2)

**Nominal Discharge Current ( $I_n$ ) Rating:** 20 kA (ST-SMDLB, ST-SMDLD) 10 kA (ST-SMDLC, ST-SMDLA)

**Diagnostics:** Green LED's, one per phase, normally on. A wide range of optional diagnostics is available (see page two for details).

**Circuit Interrupt:** Internal component-level, thermal fusing and patented circuit board mounted, over-current fusing. No external over-current protection required.

**Short Circuit Current Rating:** 200 kAIC

#### Product Qualifications:

Listed to ANSI/UL 1449-2006 3<sup>rd</sup> Edition by UL (E340498), CSA (MC#241804);  
UL 1283\* and CE Compliant (\*Type 2 SPDs only)  
ISO 9001-2008 Certified Manufacturing Facility  
2004/2006 TVSS Customer Value Enhancement Award from Frost & Sullivan

Voltage Code	ANSI/UL 1449-2006 (Third Edition) Voltage Protection Rating (VPR)						
	L-N	HL-N	L-G	HL-G	N-G	L-L	HL-L
1S1	500	-	500	-	500	1000	-
3Y1	500	-	500	-	500	1000	-
3D1	500	1000	500	1000	500	1000	1000
3Y2	1000	-	1000	-	1200	1800	-
3N2	-	-	1000	-	-	1000	-
3N4	-	-	1800	-	-	1800	-



ST-SMDLxM

Voltage Code*	Circuit Type	Peak Surge Current	MCOV	ANSI/IEEE C62.41.1 <sup>TM</sup> -2002, C62.41.2 <sup>TM</sup> -2002, C62.45 <sup>TM</sup> -2002, and C62.62 <sup>TM</sup> -2010 Measured Limiting Voltages (tested with 6 inches of lead length external to the enclosure per Clauses 6.1.1 of C62.62 <sup>TM</sup> -2010 and 37.4.4 of ANSI/UL 1449-2006)		
				Test Mode	Cat A 30 Ω 100 kHz Ring Wave 6 kV 200 A @ 90° Phase Angle	Category C (High) 10 kA 8/20 Current Driven Test†
1S1	120/240 V 1Ø (Split) (3 wire + ground)	240 kA L-N	150 V	L-N	284 V	758 V
		240 kA L-L	300 V	L-L	399 V	971 V
		240 kA L-G	150 V	L-G	270 V	841 V
		240 kA N-G	150 V	N-G	432 V	991 V
		1,440 kA Total	150 V			
3Y1	120/208 V 3Ø Wye (4 wire + ground)	240 kA L-N	150 V	L-N	284 V	729 V
		240 kA L-L	300 V	L-L	399 V	964 V
		240 kA L-G	150 V	L-G	270 V	781 V
		240 kA N-G	150 V	N-G	432 V	991 V
		2,400 kA Total	150 V			
3D1	120/240 V 3Ø High-Leg Delta (4 wire + ground)	240 kA L-N	150 V	L-N	284 V	707 V
		240 kA HL-N	320 V	HL-N	400 V	1,311 V
		240 kA L-L	300 V	L-L	399 V	964 V
		240 kA L-G	150 V	L-G	270 V	716 V
		240 kA HL-G	320 V	HL-G	391 V	1,381 V
		2,400 kA Total	150 V	N-G	432 V	991 V
3Y2	277/480 V 3Ø Wye (4 wire + ground)	240 kA L-N	320 V	L-N	400 V	1,374 V
		240 kA L-L	550 V	L-L	645 V	1,758 V
		240 kA L-G	320 V	L-G	391 V	1,414 V
		240 kA N-G	320 V	N-G	773 V	1,661 V
		2,400 kA Total	320 V			
3N2	240 V 3Ø Delta (NN) (3 wire + ground)	240 kA L-L	320 V	L-L	391 V	1,374 V
		240 kA L-G	320 V	L-G		1,414 V
		1,440 kA Total				
3N4	480 V 3Ø Delta (NN) (3 wire + ground)	240 kA L-L	550 V	L-L	645 V	1,758 V
		240 kA L-G	550 V	L-G		2,071 V

**Measured Limiting Voltage (MLV) Test Parameters:** Positive polarity, Category A: Line power applied, Category C: No line power applied, Voltages are peak (±10%). Measured Limiting Voltages are measured from the insertion point on the sine wave to the peak of the surge for powered tests. Each phase is the average of the modes within that mode of protection. In order to duplicate the results, the specified mode of protection must be tested in all modes (except N-G) and averaged together. (Individual mode or shot results may vary by more than 10%. Scope Settings: Time Base = 10 microseconds per division, Sampling Rate = 2.5 Gigsamples/sec, Bandwidth = 400 MHz (200 MHz for Cat C), Probes: Tektronix P5100/P6015A. These settings help to assure MLV results are accurate). **All tests performed with 6" lead length (external to the enclosure), simulating actual installed performance.** The MLVs reported above are certified by Third-Party, Independent Testing. Individual test reports are available upon request.

†Category C High, 10 kA is equivalent to the MLV recorded during the Nominal Discharge Current (I<sub>n</sub>) Test from C62.62<sup>TM</sup>-2010 and ANSI/UL 1449-2006.

\*Other voltage configurations may be available. Contact your sales representative for additional assistance.

Model Number Example: ST-SMDLC3Y2D5M

Base Model:	SPD Type and Nominal Discharge Current (I <sub>n</sub> ) Rating:	Voltage Code:	Options:
ST-SMDL	A = Type 2 SPD, I <sub>n</sub> = 10 kA B = Type 2 SPD, I <sub>n</sub> = 20 kA C = Type 1 SPD, I <sub>n</sub> = 10 kA D = Type 1 SPD, I <sub>n</sub> = 20 kA	See Voltage Codes 3Y2	See Option codes D5

**AC** = Internal Audible Alarm w/ test button, mute switch and red LED

**C** = Form C dry relay contacts

**D5** (CSA) = Integral, non-fused disconnect switch (TVSS unit mounts inside)

**D6** (CSA) = Same as **D5**, except no external handle

**E1** = Hub on side of enclosure

**LP** = Remote LEDs in individual NEMA 4X housings

**P** = Flush Mount Plate

**R2** = Remote lights on separate circuit board in separate enclosure

**S** = Surge counter w/ reset button



**W** = NEMA 4 Steel Enclosure

**X** = NEMA 4X Composite Enclosure (Box-in-box)

**XS** = NEMA 4X Stainless Steel Enclosure

**External Accessories:** **EACS** = Externally mounted diagnostic module, combines **AC**, **C**, and **S** options (Also available: **EAC**, **EC**, **ECS**, and **ES**) Other options may be available upon request.

Enclosure Dimensions			
Inches (mm)	Standard Model	Enclosure Options	
		W	X
A	14.00 (356)	14.00 (356)	18.00 (458)
B	12.00 (305)	12.00 (305)	16.00 (407)
C	6.00 (153)	6.00 (153)	10.00 (254)
D	15.50 (394)	15.50 (394)	19.50 (496)
E	15.98 (406)	15.98 (406)	19.98 (508)
F	13.23 (309)	13.23 (309)	17.23 (411)
G	14.75 (375)	14.75 (375)	18.94 (482)
H	10.00 (254)	10.00 (254)	14.00 (356)
Type	NEMA 12 Steel	NEMA 4 Steel	NEMA 4X Composite
lbs. (kg)	30 (13.61)	30 (13.61)	55 (24.95)

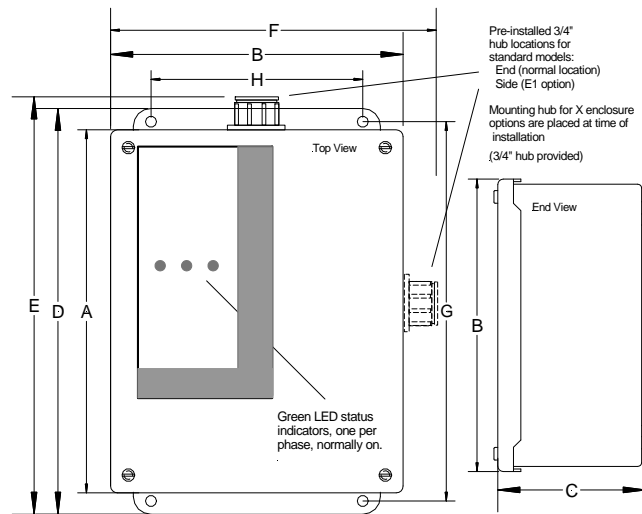

Integral Disconnect D5, D6 option configuration (Enclosure 24x20x10) (CSA)

**Circuit Connection:** #10 AWG wire (pre-installed)

**Mounting:** 3/4" hub (provided) and integral feet

Because we are constantly seeking to improve our products, specifications are subject to change at any time. Advantage® is a registered trademark of Surge Suppression Incorporated and used with permission.

**Energy Control Systems**  
Fort Worth, Texas U.S.A.

[www.sinetamer.com](http://www.sinetamer.com)

T: 817.483.8497

F: 817.572.2242